


STREET SIGN REQUIREMENTS


All streets shall use a 9" flat aluminum blank with 6" letters, upper and lower case. The prefix (N, S, E, W) and suffix (St, Ave, etc.) are 3". Sign length is determined by length of street name. The blank is covered with 3m #3990 vip diamond grade white. The letters are cut and removed from 3m # 1177 green film. This is then placed over the white to create white letters on a green background.

All signs should be mounted on the northeast corners unless obstructed. Signs may be mounted on light posts with a wing type bracket, one for each sign. Light posts must be at the northeast corner of the intersection.

FLAT ALUMINIUM BLANK THICKNESS .090

3M VIP WHITE DIAMOND GRADE FILM # 3990 Typical

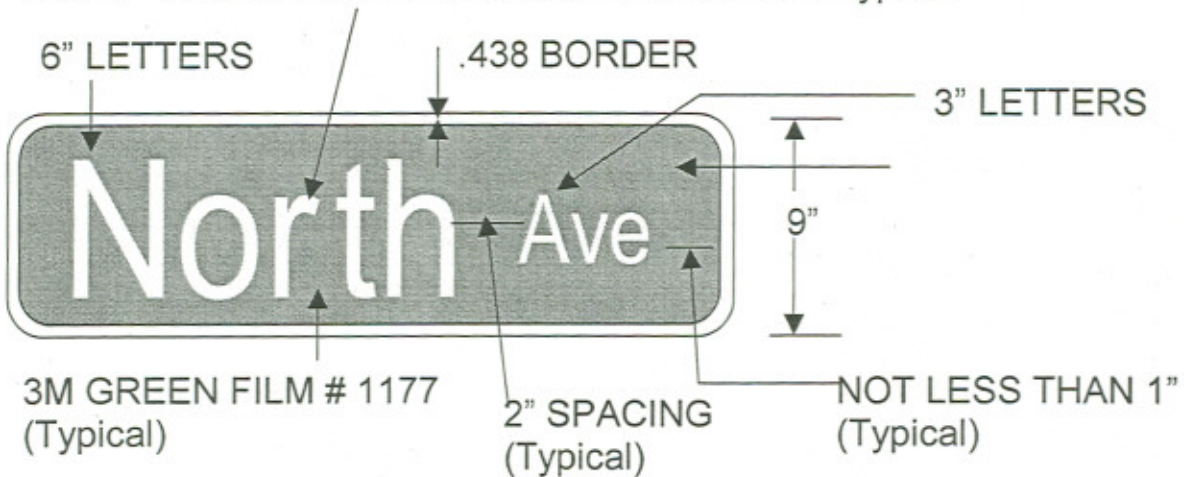

 Engineering Department	Revisions		STREET SIGN REQUIREMENTS		EXHIBIT II-H-1
	Date:	By:	Scale:	Checked:	
	12/03	D. Feltman	None		
			Date:	Drawn: D Goewey	